



# SL3 eLED<sup>®</sup>

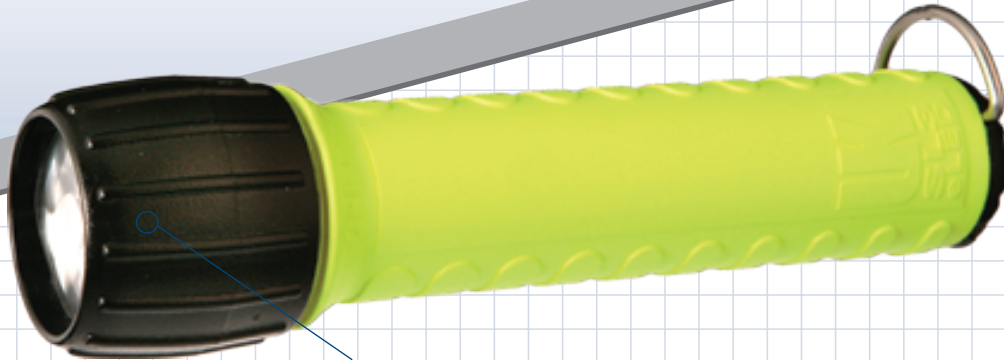

Advanced Compound Path Optics

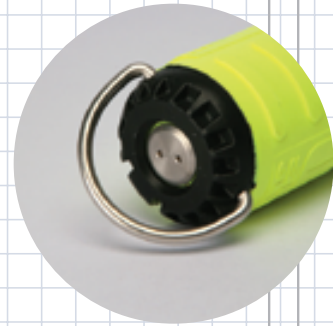


Reinforced Stainless Steel Ring

## COLORS

- Black
- Safety Yellow

## SPECIFICATIONS

- Size:** 7.5 x 1.9 x 1.9 in  
 19.1 x 4.9 x 4.9 cm
- Weight:** 11.8 oz / 334.5 gm
- Batteries:** 3 C / LR14
- Brightness:** 98 lumens
- Distance Seen:** 394 ft / 120 m
- Burn Time:** 30 hours
- Depth Tested:** 500 ft / 150 m

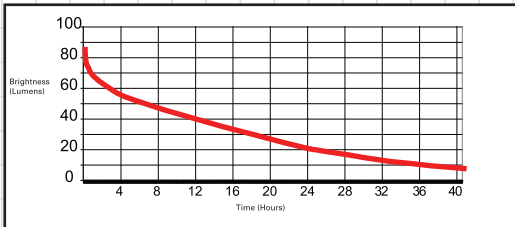

## Part Numbers

### Counter Display

- 22203 SL3 eLED 9-Pack Display w/Batteries, 5 Safety Yellow/4 Black (US)
- 22201 SL3 eLED, Safety Yellow, with Batteries (single refill for POP Display)
- 22202 SL3 eLED, Black, with Batteries (single refill for POP Display)

### Single Packs

- 22204 SL3 eLED, Safety Yellow, Single Pack, No Batteries
- 22205 SL3 eLED, Black, Single Pack, No Batteries
- 22206 SL3 eLED, Safety Yellow, Single Pack, With Batteries
- 22207 SL3 eLED, Black, Single Pack, With Batteries

## FEATURES

Proprietary **Compound Path Optics (CPO)** Guarantees a tight beam with minimum spill light



**Thermal Recovery System (TRS)** Recycles wasted heat from the LED back into the battery for increased brightness and burn time



- Twist ON/OFF bezel sealed with two O-Rings for reliability
- Reliable waterproof seal requires 3 turns for first O-Ring release (5 turns for second O-Ring)
- Beam produces a bright spot with almost no peripheral light, reducing backscatter
- Internal pressure relief valve- releases excess pressure due to battery malfunction or flooding
- Powered by 3 C / LR14 batteries
- High impact PC/ABS, LEXAN<sup>®</sup>, polyurethane rubber, and stainless steel construction for durability
- Fits in BC pocket
- Limited Lifetime Warranty
- Made in USA

