

LIMITED LIFETIME WARRANTY

UK International products are engineered for maximum performance and durability. All products carry a Limited Lifetime Warranty to the original retail purchaser to be free from defective material and workmanship under normal and intended use. In addition, the UK International Limited Warranty covers materials used in its products to the original purchaser, from the date of purchase, as follows: plastics for 10 years; fabrics and rubber for 3 years; rechargeable batteries for 90 days; and lamps for 30 days (batteries and lamps are not manufactured by UK International).

In the event the original retail purchaser detects a defect in the material or workmanship, the product along with proof of purchase date should be returned to an authorized UK International dealer or directly to UK International with the postage prepaid. UK International agrees to repair or replace at UK International's sole discretion any product found to be defective in material or workmanship within the time period specified above. For the complete Limited Lifetime Warranty write to UK International. Address all correspondence and returns to:

UK International

13400 Danielson Street; Poway, CA 92064 U.S.A.

email info@ukinternational.com

LITFINGER SPECIFICATIONS

Lamp: 1-watt high intensity LED

Lamp Life: 50,000 hours

Maximum Brightness: 15 lumens (high); 7 lumens (low)

Burn Time: 4 hours (high); 10 hours (low)

Voltage: 3.6 volts

Battery: 3 x Alkaline AAA or Lithium AAA-cell

Materials: Aluminum body

Size: 6.2 x 2.3 x 0.9 inch

Weight: 7 oz with batteries

Arc Blast Test: Passed 3000 V, 8000 A, 0.5 sec (30 cycles)

PN 400158 rev 5/30/06

LITLINK™ INSTRUCTIONS



**Lights Up Your
Hot Stick Tools
for Safety and
Efficiency**

Patents Pending



® Poway, California • www.ukinternational.com

LITLINK OPERATION


The LITLINK™ is the first hot stick tool light. By connecting it in line with any hotstick tool, the LITLINK's high intensity LED provides lighting for work in dark or unlighted areas. Night operations become safer and more efficient. Fits all major hot sticks and tools with splined universal slotted connector.

Battery Insertion Open the battery compartment door by pulling back on the lid locking clip. Load 3 alkaline AAA cells as shown with the + positive ends of the batteries all pointing the same direction. For cold weather operation lithium AAA cells can be used. Make sure that the rubber gasket water seal around the lid is clean, then snap the lid closed.

OFF-HIGH-OFF-LOW Switch

Pushing the black switch toggles the light between high brightness and low brightness (longer burn-time) as shown in the graph.

Every time the light is turned OFF and ON, the brightness is switched from HIGH to LOW or LOW to HIGH.

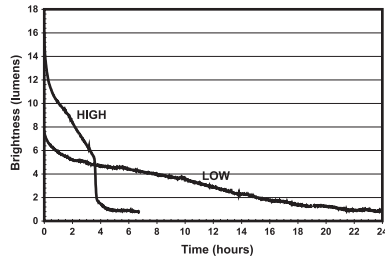


Setting Up the Hotstick with a Tool and LITLINK™

Bolt the LITLINK™ to the end of a hot stick using the universal splined connector as indicated. Similarly bolt a tool to the other end of the LITLINK™. Check to make sure the light from the LITLINK™ is lighting up the tool. If the light is pointing the opposite direction, attach the tool to the other side of the LITLINK™. This reverses the direction of light so that the light will shine on the work area. Turn the LITLINK™ on HIGH or LOW power before raising the stick.

Maintenance Although the LITLINK™ lid is sealed, make sure it is dry after use. If it becomes wet, shake or blow the water out and allow the unit to dry before resealing. Do not store batteries in the light during extended periods of storage. To save batteries, make sure the light is OFF after use.

LITLINK™
Designed by Linemen for Linemen

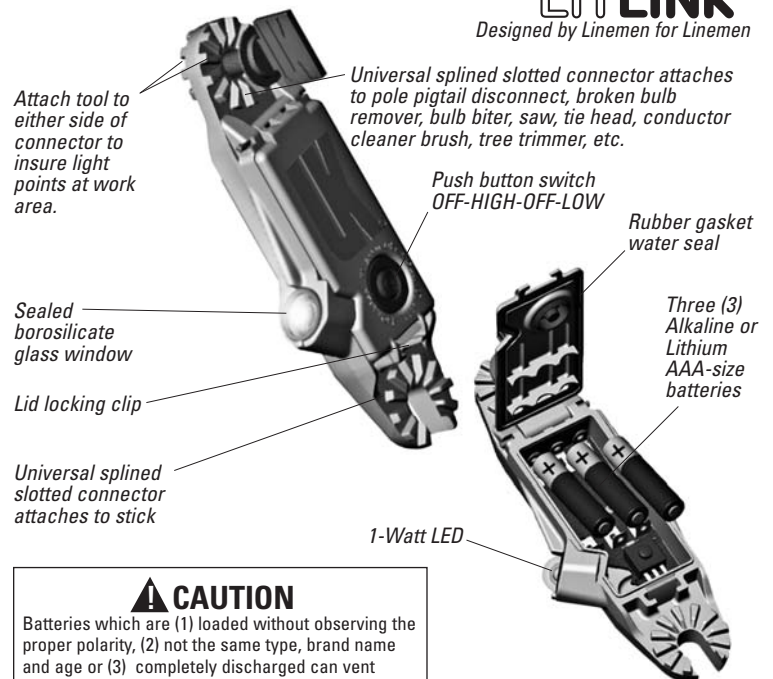

Patents Pending

CAUTION

Batteries which are (1) loaded without observing the proper polarity, (2) not the same type, brand name and age or (3) completely discharged can vent hydrogen gas and possibly cause an explosion.

- Load batteries according to the diagram shown on the light or in these instructions.
- Do not mix batteries of different type, brand name or age.
- Discard all batteries as soon as they are drained or no longer produce light.

