



4AA Xenon Light

High-Intensity Work/Outdoor Flashlight



4AA Xenon Light

High-Intensity Work/Outdoor Flashlight

High-Intensity Xenon Light World's Best Selling Attachable Helmet Light

FEATURES



→ Push button on/off momentary switch



• Ultra-high impact ABS construction



→ Easy load battery system

• Passes 6' drop test

→ Mounts to all work helmets

• Limited lifetime warranty

ACCESSORIES Sold Separately



14819
Universal
Helmet Clip



14818
Stainless Adjustable
Helmet Clip



14802
Stainless Fixed
Helmet Clip



14851
RyLee Clip



14816
Nylon Belt
Pouch



14808
Safety
Wand

SPECIFICATIONS

POWER	2.1 Watts
LAMP	Xenon filled incandescent
BRIGHTNESS	38 Lumen (Average)
BATTERY	4 Alkaline AA/LR6 4 Lithium AA/L91
BURN TIME	4-5 Hours (Alkaline) 7-8 Hours (Lithium)
SIZE	6.1 x 1.6 x 1.4 Inches
WEIGHT	5.5 oz (Alkaline) 4.0 oz (Lithium)

IMPORTANT: READ ENCLOSED INSTRUCTIONS


HAZLOC RATINGS

CL I, DIV 2, GP A, B, C, D, CL II, DIV 2, GP G, CL III, DIV 2, T2A

CL I, DIV 2, GP A, B, C, D, T2, CL II, DIV 2, GP F, G, CL III, DIV 2, T3C



Note: Light is not certified for use with Lithium batteries in hazardous locations. Use only listed Alkaline cells.



UK International

Uncompromising performance since 1971™

13400 Danielson Street
Poway, CA 92064 USA
(858) 513-9100

www.ukinternational.com

© 2006 UK. All Rights Reserved. "UNDERWATER KINETICS," the UK logo and all product names and logos are trademarks of Underwater Kinetics.



CLASS 1 | DIV 2

HAZARDOUS LOCATIONS

Big Reflector Brightness In Compact Design

- Ergonomic push button thumb switch
- Long distance focused beam
- Alkaline, Lithium, NiMH AA battery compatible



WATERPROOF
UP TO 10 METERS
DUSTPROOF

NON CONDUCTIVE
CORROSION PROOF

UK4AA XENON LIGHT

Model Number: UK4AA-AS2

Instructions & Important Information

Thank you for purchasing this UK all environment work and outdoor light! It is tough enough for use in rain, snow, smoke, dust or hazardous

locations (see listing). The high intensity xenon lamp outperforms lights many times its size

Battery Installation

To install batteries, hold the case in the position shown. Drop the batteries one by one into the case in the order shown. Make sure that the (+) end of the battery is down for 1 and 2 and up for batteries 3 and 4. Next insert the lamp module into the case. Place the bezel over the lamp module and screw it onto the case.

ON/OFF

To operate the UK4AA push in on the black rubber switch to turn the light on and off. For momentary lighting press the switch half-way in. Make sure the bezel is screwed all of the way down or the UK4AA will not light. By partially unscrewing the bezel you can protect the light from turning on by accident.

O-Ring Seal

Lightly lubricate the O-ring with silicone grease. Do not use tools to remove the O-ring.

Pressure Equalizing Vent

Air and gas from battery leakage can pass freely in and out of the UK4AA through a vent in the rear of the light. Do not allow dirt or grease to accumulate on the vent or it will not operate properly.

Care and Maintenance

■ Keep area around the O-ring clean.

■ For longer lamp life, turn the light on for several minutes after loading fresh batteries to "age" the batteries.

■ If the light floods, empty it immediately, rinse with fresh water and dry completely before reassembly.

■ Replace the reflector/lamp, which contains a hydrogen absorbing catalyst, if it gets wet.

■ Do not store batteries in the light for long periods of time; they may leak and damage the light.


Limited Lifetime Warranty

UK International products are engineered for maximum performance and durability. All products carry a Limited Lifetime Warranty to the original retail purchaser to be free from defective material and workmanship under normal and intended use. In addition, the UK International Limited Warranty covers materials used in its products to the original purchaser, from the date of purchase, as follows: plastics for 10 years; fabrics and rubber for 3 years; rechargeable batteries for 90 days; and lamps for 30 days (batteries and lamps are not manufactured by UK International).

In the event the original retail purchaser detects a defect in the material or workmanship, the product along with proof of purchase date should be returned to an authorized UK International dealer or directly to UK International with the postage prepaid. UK International agrees to repair or replace at UK International' sole discretion any product found to be defective in material or workmanship within the time period specified above. For the complete Limited Lifetime Warranty write to UK International.

Address all correspondence and returns to:

UK International
13400 Danielson Street
Poway, CA 92064

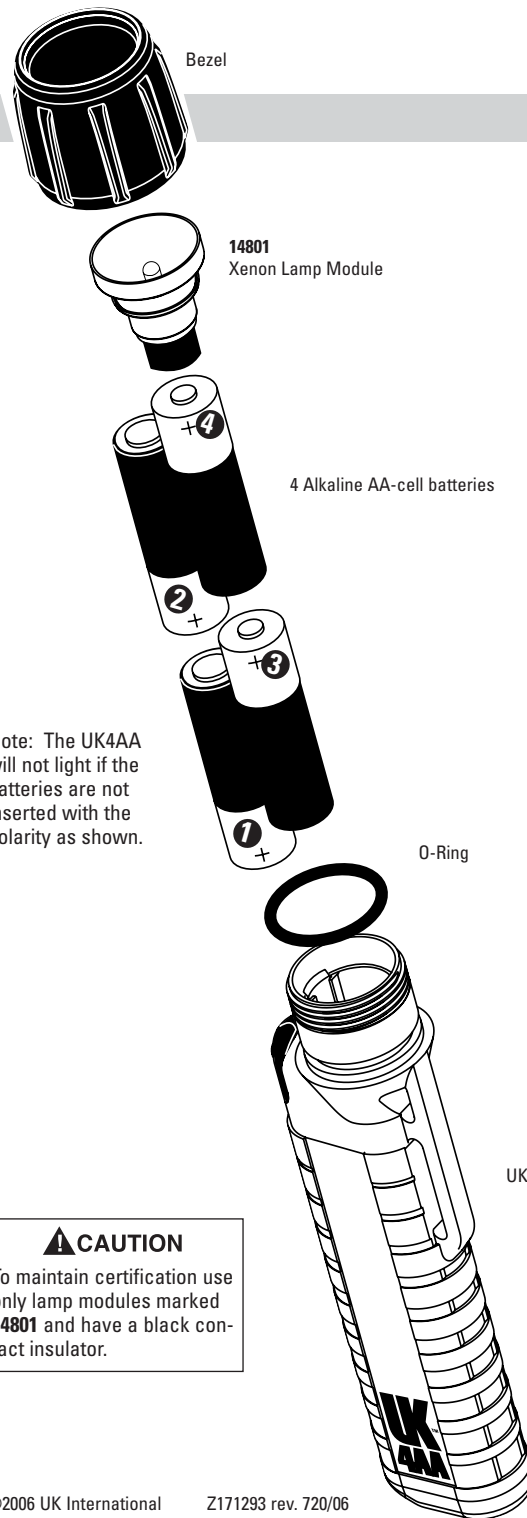

Note: The UK4AA will not light if the batteries are not inserted with the polarity as shown.

CAUTION

To maintain certification use only lamp modules marked **14801** and have a black contact insulator.

Certification

FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS. USE ONLY WITH 14801 LAMP AND FOUR DURACELL MN1500/PC1500, ENERGIZER E91/EN91 OR RAYOVAC AL-AA/815 1.5 V SIZE AA ALKALINE BATTERIES.



CL I, DIV 2, GP A, B, C, D,
CL II, DIV 2 GP G,
CL III, DIV 2 T2A



CL I, DIV 2 GP A, B, C, D,
T2 CLII, DIV 2, GP F, G,
CLIII, DIV 2, T3C

CAUTION

Batteries can vent hydrogen gas and possibly cause an explosion if they are (1) installed without the proper polarity, (2) not the same type, brand name and age or (3) completely discharged.

- > Load batteries according to the diagram.
- > Discard all batteries as soon as they are drained or no longer produce light.
- > Do not mix batteries of different type, brand or age.

UK4AA-AS2 Case

Vent